

EZ-T CABLE & ASSEMBLY

HIGH CRUSH RESISTANCE

With small diameter, 1F/2F 3.0mm
12F 3.5mm, 24F 5mm and dual strength member (FRP and Kevlar)
EZ-T is suitable for FTTH Drop, In-Home wiring
and Data Center Multi Fiber assembly

SMALL &
FLEXIBLE



Available

with G.652D, G.657A1, A2
and A3 and OM1, OM2,
OM3 and OM4 Fiber

Available

with Riser, Plenum,
LSZH material and
different color jacket




Extra Small & Ultra light

weight cable with
1 to 48 Fiber count



High crush resistance

up to 200Kgs
per GR-409



High Tensile strength

without conductive
material




Great bending performance

less than 0.1dB
macrobending loss at
1550nm with 10mm
radius with G.657A2 Fiber


EZ-T Cable 2F 3.0 mm O.D.

3.0
mm

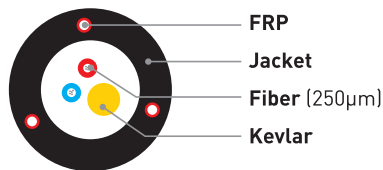


EZ-T Cable 12F 3.5mm O.D.

3.5
mm

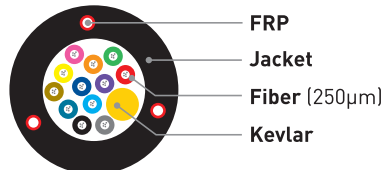


EZ-T Cable 24F 5.0 mm O.D.

5.0
mm

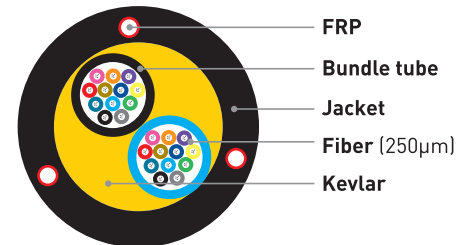

Bending Corners and Loading Test

3mm EZ-T Simplex Cable with G.657A1 fiber. We tested the cable with 40 x 90 degree corners, staples and a 15kg weight placed directly onto jacket; the total loss at 1550nm was less than 0.1dB.

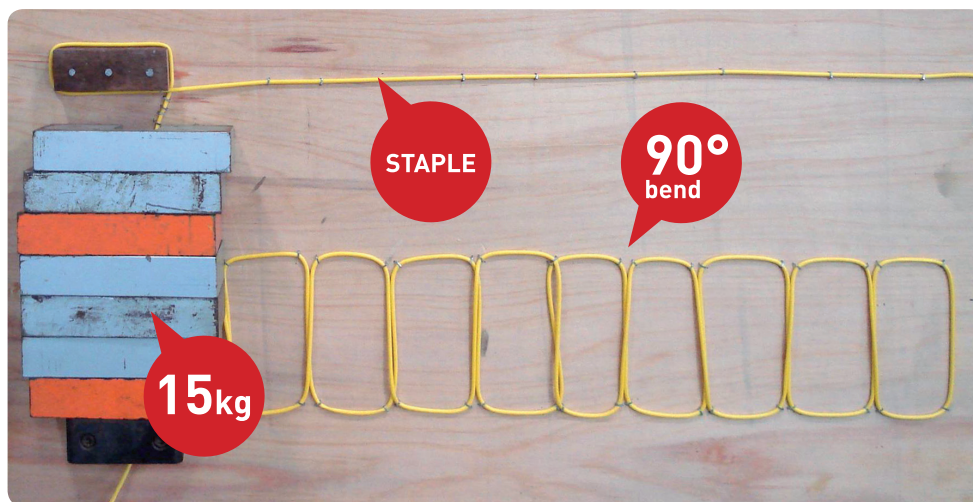

BENEFITS



12F/24F type is ideal for Data Center Application



Easy installation even in over populated duct without twist and kink.



Ideal for in-house wiring, under carpet, stapling etc.



Suitable for factory termination and field installable connectors

SENKO ADVANCED COMPONENTS, INC.

Americas

USA EAST 1-888-32-SENKO
USA WEST 1-858-623-3300
Sales-Americas@senko.com

Asia

HONG KONG +852-2121-0516
SHANGHAI +86-21-5830-4513
SHENZHEN +86-755-2533-4893
Sales-Asia@senko.com

Europe

UK +44 (0) 118 982 1600
ITALY +39 011 839 9828
POLAND +48-71/77-60-737
Sales-Europe@senko.com

Asia Pacific

AUSTRALIA +61 (0) 3 9755-7922
Sales-Asia-Pacific@senko.com

Middle East North Africa

Dubai +971 4 8865160
Sales-MENA@senko.com

Japan

TOKYO +81-(0)3-5825-0911
Sales-Japan@senko.com

CALL 1-888-32-SENKO